


Hopper Attachment Instructions

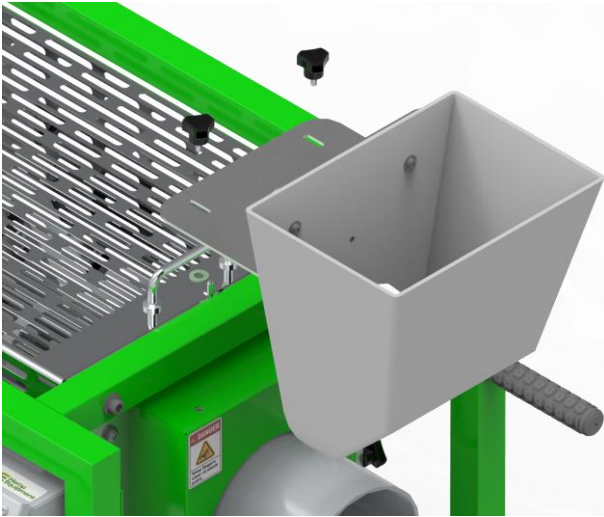

What's Included

1. Hopper Assembly (qty 1)
2. Washers (qty 2)

Tools Needed

1. Allen Wrench, 7/32
2. Combination Wrench, 7/16

Instructions

1. Remove existing knobs from Inlet side of the Belt Guards
2. Install Hopper Assy per drawing ensuring washers are between Hopper Assy and Belt Gaurds.
3. Adjust by loosening and then tightening screws on Hopper Assy to ensure minimal to zero interfacing with Tumbler Assy



425-802-1166



bpbale@behempequipment.com



Behempequipment.com

